




Stavěcí šrouby, zátky

NORMA: DIN 908

ŠROUBY UZÁVĚRU-S VNITŘNÍM ŠESTIHRANEM
A NÁKRUŽKEM, METRICKÝ JEMNÝ ZÁVIT
HEXAGON SOCKET SCREW PLUGS METRIC
FINE CYLINDRICAL THREAD

Materiál: Ocel (bez těsnícího kroužku), nerez - A2, A4
Povrchová úprava: Bez povrchové úpravy, zinek

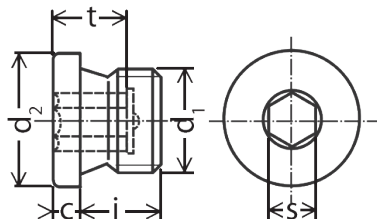


d1	c	d2h14	i	l	s	t min
8*1	3	12	7,5	10,5	4	5
10*1	3	14	8	11	5	5
12*1,5	3	17	12	15	6	7
14*1,5	3	19	12	15	6	7
16*1,5	3	21	12	15	8	7,5
18*1,5	4	23	12	16	8	7,5
20*1,5	4	25	14	18	10	7,5
22*1,5	4	27	14	18	10	7,5
24*1,5	4	29	14	18	12	7,5
26*1,5	4	31	16	20	12	9
30*1,5	4	36	16	20	17	9
30*2	4	36	16	20	17	9
33*2	5	39	16	21	17	9
36*1,5	5	42	16	21	19	10,5

d1
M 8*1
M 10*1
M 12*1,5
M 14*1,5
M 16*1,5
M 18*1,5
M 20*1,5
M 22*1,5
M 24*1,5
M 26*1,5
M 30*1,5
M 30*2
M 33*2
M 36*1,5

NORMA: DIN 908

ŠROUBY UZÁVĚRU-S VNITŘNÍM ŠESTIHRANEM
A NÁKRUŽKEM, TRUBKOVÝ ZÁVIT
HEXAGON SOCKET SCREW PLUGS PARALLEL
PIPE THREAD

Materiál: Ocel (bez těsnící kroužku)
Povrchová úprava: Bez povrchové úpravy, zinek

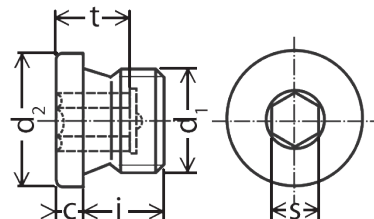

d1	c	d2h14	i	l	s	t min
G1/8	3	14	8	11	5	5
G1/4	3	18	12	15	6	7
G3/8	3	22	12	15	8	7,5
G1/2	4	26	14	18	10	7,5
G5/8	4	28	14	18	12	7,5
G3/4	4	32	16	20	12	9
G1	5	39	16	21	17	9
G1 1/4	5	49	16	21	22	10,5
G1 1/2	5	55	16	21	24	10,5

d1
G1/8
G1/4
G3/8
G1/2
G5/8
G3/4
G1
G1 1/4
G1 1/2